



Nevada
 Department of Transportation
 1263 S. Stewart Street Rm. 101
 Carson City, Nevada 89712

PHONE: (775) 888-7410
 800-552-2127
 HOURS: 8:00 A.M.-5:00 P.M.
 Closed Every Thursday 8-10 AM
PACIFIC TIME

Legal Limits	DESIGNATED HIGHWAYS	ALL OTHER ROADS
Weight:		
Single	20,000	20,000
Tandem	34,000	34,000
Tridem	42,000	42,000
Gross weight	80,000	80,000
	<i>Bridge Formula applies.</i>	
Width:	8'6"	8'6"
Height:	14'	14'
Length:		
Single unit	40'	40'
Buses	45'	45'
Semi-trailer	53'	53'
Twins/doubles	28'6"	75' overall
Autotransporters	70'	70'
Rocky mtn. doubles	48'+42'/105' overall*/**	Not allowed on county rds.
Turnpike doubles	105'*/**	Not allowed on county rds.
Triples	105'**	Not allowed on county rds.
Saddlemounts	70'	70'
TOLERANCE	None.	
TIRE WIDTH	600 lbs. per inch width for steering axle and 500 lbs. per inch width for other axles.	
ACCESS	Not applicable.	

NEVADA

OVERHANG	Overhang cannot exceed 10'. No vehicle can exceed 70' with exception of 75' when including overhang.																												
EXEMPTIONS	<p>The provisions with respect to maximum width do not apply to implements of husbandry incidentally operated, transported, moved or towed over a highway. If an implement of husbandry is transported or moved as a load on another vehicle over 1.) a highway which is part of the national system of interstate and defense highways if the load exceeds 8'6" in width or 2.) any other highway if the load exceeds 10' in width.</p> <p>The vehicle and load must not be operated for a distance of more than 25 miles from the point-of-origin of the trip and must not be operated at a speed in excess of 30 m.p.h.</p> <p>Vehicles carrying a load of loosely piled agricultural products such as hay, straw or leguminous plants in bulk but not crated, baled, boxed or sacked, the load and any loading racks retaining the load must not exceed 10' in width.</p>																												
Permit Limits	ROUTINE ISSUE <table><tr><td>Weight:</td><td></td></tr><tr><td> Single</td><td>Depends on axle spacings and routes.</td></tr><tr><td> Tandem</td><td>Depends on axle spacings and routes.</td></tr><tr><td> Tridem</td><td>Depends on axle spacings and routes.</td></tr><tr><td> Quad</td><td>Depends on axle spacings and routes.</td></tr><tr><td> Trunnion</td><td>Depends on axle spacings.</td></tr><tr><td> Gross weight:</td><td></td></tr><tr><td> 5 Axles</td><td>92,000 70' axle spacings.</td></tr><tr><td> 6 Axles</td><td>96,000 70' axle spacings.</td></tr><tr><td> 7 Axles</td><td>101,000 70' axle spacings.</td></tr><tr><td> 8 Axles</td><td>106,000 70' axle spacings.</td></tr><tr><td> Length:</td><td>No set maximum. Each trip is looked at individually. If over 110' urban area and 150' rural</td></tr><tr><td> Width:</td><td>17' urban area 26' rural</td></tr><tr><td> Height:</td><td>18'</td></tr></table> <p>Trip permits are reviewed on an individual basis only (length, width, height). Loads 17' wide or greater and 18' high and greater require special approval. If load exceeds any of these dimensions or weights, refer to the section on Super Loads.</p> PERMITS VALID FOR Single trip permits are valid for five (5) consecutive days, one trip only. Annual multiple-trip permits are valid for 12 months from date of issue.	Weight:		Single	Depends on axle spacings and routes.	Tandem	Depends on axle spacings and routes.	Tridem	Depends on axle spacings and routes.	Quad	Depends on axle spacings and routes.	Trunnion	Depends on axle spacings.	 Gross weight:		5 Axles	92,000 70' axle spacings.	6 Axles	96,000 70' axle spacings.	7 Axles	101,000 70' axle spacings.	8 Axles	106,000 70' axle spacings.	 Length:	No set maximum. Each trip is looked at individually. If over 110' urban area and 150' rural	 Width:	17' urban area 26' rural	 Height:	18'
Weight:																													
Single	Depends on axle spacings and routes.																												
Tandem	Depends on axle spacings and routes.																												
Tridem	Depends on axle spacings and routes.																												
Quad	Depends on axle spacings and routes.																												
Trunnion	Depends on axle spacings.																												
 Gross weight:																													
5 Axles	92,000 70' axle spacings.																												
6 Axles	96,000 70' axle spacings.																												
7 Axles	101,000 70' axle spacings.																												
8 Axles	106,000 70' axle spacings.																												
 Length:	No set maximum. Each trip is looked at individually. If over 110' urban area and 150' rural																												
 Width:	17' urban area 26' rural																												
 Height:	18'																												
	ACCEPTABLE PERMIT FORMAT If permittee has a paper copy must be signed to be valid. If shown electronically, the permit doesn't have to be signed but by showing it permittee agrees to the terms & conditions.																												

EXTENSIONS/REVISIONS

No extensions granted. Revisions only on the day permit ordered.

OPERATING TIME

One-half hour before sunrise until one-half hour after sunset for daytime travel.

Night travel will be given if maximum dimensions do not exceed 14' wide, 15' high, 110' long, 15' overhang.

WEEKEND TRAVEL

Night and Saturday/Sunday travel will be given for dimensions not exceeding 14' wide, 15' high, 110' long, 15' overhang.

No travel on I-15 between Las Vegas Exit 33/Blue Diamond and CA line if over 12' wide, 15' high, 110' long, 15' overhang on Sundays from 2pm – 10pm & from CA/NV Line I-15 to Exit 33/Blue Diamond on Fridays from 2pm – 10pm over 12' wide, 15' high, 110' long, 15' overhang. (Northbound on Fridays & Southbound on Sundays)

LIFT AXLES

No law regarding lift axles so if it is on the ground it is considered an axle and the tire width and the spacings will determine the weight.

DIVISIBLE LOADS

The Department will not issue permits for those vehicles or vehicle combinations and loads that are reducible in length, width or height.

Loads which are transported under authority of a permit shall be non-reducible in nature in length, width and height. This includes items of machinery, construction equipment, fabricated units, mobile cranes, off-highway trucks, earth moving equipment, etc. Blades or rippers attached to tractors are considered as part of the machine and therefore are non-reducible.

EXCEPTIONS

Blades do not have to be removed. If buckets or counterweights, they can be removed they should be; if overweight can haul as part of the load if is part of the load. .

SELF-PROPELLED EQUIPMENT

Each case is looked at individually. Axle spacings are required to determine the maximum weight allowed on an axle. Cranes may be issued multi trip permits if dimensions do not exceed 14' high, 90' long or 12' wide. All self-propelled applications must contain a self-propelled application and scale ticket with company's name and matching unit #.

INTERMODAL

It must be legal.

NEVADA

MANUFACTURED HOUSING/MOBILE HOMES

Evidence of insurance shall be furnished by the insurer - limits 100/300/50. Expiration or cancellation of this insurance will automatically void the permit. The permit shall become void when the length of a mobile home box exceeds 80'.

Movement of mobile homes in excess of 16' wide are not permitted.: In addition to the above special provisions, or restrictions pertaining to or attached to the transportation permits the following shall also apply: the minimum number of axles on the mobile and modular home shall be not less than one for each 6,000 lbs. of weight and shall be spaced to afford maximum stability, tracking and distribution of weight.

The combined braking force for towing unit and mobile and modular home shall be not less than 43.5% of the gross combination weight. The deceleration of the combination shall be not greater than 14' per second.

The braking distance shall be not greater than 50' at 20 m.p.h. The minimum tire size to be used on the mobile and modular home shall be not less than 8.00 x 14.5" 10-ply on all wheels.

The power unit used to tow an overwidth trailer coach or mobile home having a gross weight of 18,000 lbs. or less must be at least a 3/4-ton truck or tractor equipped with dual wheels. If it has a gross weight of over 18,000 lbs., the power unit must be at least a 1/2-ton truck equipped with dual wheels.

Types of Permits

Single Trip Permit \$25.00

Generally issued for the movement of over-dimensional vehicles or vehicle combinations and loads.

Annual Permit \$60

Issued for farm machinery used in seasonal harvesting, construction type equipment, and special mobile type equipment, that does not otherwise conform to statutory requirements provided:

- 1.) Maximum width is no more than 14'.
- 2.) Maximum length does not exceed 110'.
- 3.) Maximum height does not exceed 15'.
- 4.) Maximum gross weight and axle loading will not exceed that established by evaluation of the application based upon axle configuration and overall length.
- 5.) Maximum overhang 25'.

The maximum length allowed on an Annual permit shall not exceed 110' unless we have a letter on file stating that they have a steerable rear axle, then they can go up to 120' long.

INFORMATION NEEDED TO ORDER PERMIT

Name of applicant, name of company, load description, tractor unit number, overall width, overall height, overall length, actual gross weight (if overweight, axle spacings), steer tire size (if overweight), overhang, origin and destination (address if stopping or starting in NV), routes, effective date and where to email the permit.

Escorts

When Escorts Are Needed:

Escorts

On 2 or 3 -Lane Roads:

- Width 12'1" to 14'
- Width 12'1" to 14' - night travel
- Width 14'1" to 16'
- Width over 16'
- Width over 17' wide
- Length over 110'
- Overhang over 25' - front and rear (combo)
- Height over 15'6"

- 1 Front
- 2 (Front & Rear)
- 2 (Front & Rear)
- 2 (1 Front & 1 Rear)
- 2 (1 Front & 1 Rear)
- + other state requirements require highway patrol
- 1 Rear
- 1 (Front or Rear)
- 1 Front w/high pole

On Interstate & 4 More Lanes:

- Width 12'1" to 14' - night travel
- Width 14'1" to 16'
- Width 16'1" to 19'
- Width over 19'
- Height over 15'6"
- Length over 110'
- Overhang over 25' - front and rear (combo)

- 2 (Front & Rear)
- 1 Rear
- 2 (Front & Rear)
- 2 (1 Front & 1 Rear)
- + other state requirements require highway patrol
- 1 Front w/high pole
- 1 Rear
- 1 (Front or Rear)

- Notes:**
- Highway Patrol needs 5 business days notice
 - Permit office needs at least 5 business days notice to permit a "Super Load"
 - Can convoy loads but not pilot cars.

Mobile Homes:

Same requirements as above except no night travel allowed.

VEHICLE REQUIREMENTS

An escort shall have a minimum width of 60" and a minimum wheel base of 95", it shall be no larger than a 1-1/2 ton truck, and shall display appropriate warning signs. Signs shall be removed promptly upon completion of escort duty. Flashing lights when specified on the face of the permit must meet Nevada Highway Patrol requirements.

Signs, Flags

SIGNS/FLAGS

All loads or vehicles in excess of 8'6" wide must display "Oversize Load" or "Wide Load" signs front and rear. When a wide load is transported the signs shall be promptly removed upon completion of work. The minimum size warning signs shall be have black letters 10" high of 1 5/8 inch minimum stroke on a yellow background. Warning signs shall be neat, clean and mounted securely. Signs shall be displayed only when necessary and "Oversize Load" shall have precedence over other signs in questions of which to use. Warning flags must be at least 18 inches square and solid red or fluorescent orange in color. Flags must be displayed:

1. Front & Rear corner of the vehicle
2. If load is wider than vehicle:

At each front & rear corner of the load

At any other location on the load that is necessary to identify the maximum width of the load

3. If rear overhang exceeds 4 feet in length:

At the center of the overhang if the overhang does not exceed 2 feet in width

FLAGGER

Flagpersons may be determined as being necessary in order to warn and direct approaching traffic, each flagman must be wearing a red jacket or vest and be equipped with a red flag and paddle reading "STOP" in white letters with red background. Flagpersons shall not be less than 18 years of age and have flagger certification.

Insurance

The permittee shall indemnify the State of Nevada and save it harmless from and against any liability for injury to persons or damage to property whether said property may belong to the State, to the Permittee or to third parties, which injury or damage is sustained by reason of any cause directly or indirectly resulting from the exercise of the privilege granted.

Buildings over 10' wide and all mobile homes require insurance certificates for the towing vehicle, policy number and effective dates. \$450,000 Total liability. Breakdown: \$100,000 injury or death of one person, \$300,000 injury or death of two persons, \$50,000 property damage.

Weigh Stations

No permanent weigh scales.

Restricted Travel

When traffic, weather or other conditions are determined by the State Department of Highways or policing agency to constitute a hazard, the permit may be temporarily suspended or restricted in use.

The following are special restrictions for wide loads on certain Nevada Routes under jurisdiction of the Department of Transportation: (Cannot use as bypass, must be delivering on the route)

- | | |
|-------|--|
| SR28 | From US 50 at Spooners Summit to Nevada-California state line: All loads exceeding 8'6" require front and rear escorts. Loads are not allowed. |
| US93 | (Boulder Dam) from SR500 North of Boulder to Boulder Dam: Loads are not allowed. |
| SR160 | From junction with State Route 159 (Blue Diamond Road) to Clark-Nye County Line. |
| SR207 | From US 50 to SR 209 (Kingsbury Grade): |
| SR208 | (Wilson Canyon) from US 395 to Yerington: Loads are not allowed. |
| SR225 | (Owyhee Canyon) only from Wild Horse to the Nevada-Idaho border: |
| SR229 | (Secret Pass) from I-80 to US 93: all loads exceeding 8'6" require front, rear escorts. |
| SR341 | (Geiger Grade) from US 395 to US 50: Loads exceeding 8'6" require front and rear escorts. |
| SR431 | (Mt. Rose Highway) from Timberline Drive to SR28: Loads exceeding 8'6" require front and rear escorts. |

Trip permits have to be submitted for all loads traveling on restricted routes. Special permission will be limited to loads that must be delivered to destinations on or near the restricted route that cannot be reached using any other highway. If special permission is granted for loads exceeding the above limitations a one trip permit and front and rear escort will be required.

These restrictions are subject to change without notice. Usually updated annually. The basic rules governing escort vehicles and permits for loads exceeding legal width remain unchanged.

SPRING WEIGHT RESTRICTIONS

Frost laws from February 1, through April 30, (approximately). During this time certain routes are restricted for weight and if traveling on those routes you must be legal on your axles. These restrictions are updated annually. Updated lists are posted on NDOT's website nevadadot.com

Holidays

Travel restricted may apply on the following holidays:

New Year's Day	Independence Day	Thanksgiving Day (& Day After)
Martin Luther King Day	President's Day	Nevada Day (Last Fri. in Oct.)
Christmas Day	Memorial Day	Veteran's Day
Labor Day		

Holiday travel is allowed for the following vehicles: Up to 14' wide, 15' high and 110' long with 15' overhang.

Over 12' wide will require pilot car restrictions

The State Permit Office will be closed on the above mentioned days as well as *Nevada Day, Juneteenth Day, and the day after Thanksgiving, but travel will not be restricted on these additional days.

*Travel is restricted on I15 between Las Vegas (exit 33) and California line if over 12' wide, 15' high and 110' long 15' overhang on Friday's from 2pm – 10pm if heading Northbound & on Sunday's from 2pm – 10pm southbound.

Fines

Carriers receiving repeated citations for violation of the permit conditions may, at the Department's discretion, after three such citations /violations have permit privileges suspended for up to 30 days as set forth in these rules and regulations.

Fines for weight range from \$10 up to \$.08 cents a pound for 10,000 lbs. and above.

Fines doubled during spring weight restriction- February through May.

Super Loads

Each load is reviewed individually and it depends on routes, overall dimensions and axle spacings. If the Department wants a special review, a drawing including axle spacings and weight will be required. Route surveys may also be required

Must submit information at least 5 business days in advance.

For more information please contact:

Comdata

(800) 749-7174

To obtain and order permits from Comdata please call:

(800) 749-7166

NEVADA DEPARTMENT OF TRANSPORTATION

PURPLE WEIGHT AND BONUS OVERLOADS CHART**Example: 8' 0" Distance Between First and Last Axle**

50,400	4 tires, 8' 0" Wide	Purple Load = $1.5 \times 700 (L + 40)$
57,960	8 tires, 8' 0" Wide	Purple Load (+ 15%) = $1.15 \times 1.5 \times 700 (L + 40)$
63,000	8 tires, 10' 0" Wide	Purple Load (+ 25%) = $1.25 \times 1.5 \times 700 (L + 40)$

IN. → FT. ↓	0	1	2	3	4	5	6	7	8	9	10	11
2	28,000	28,000	28,000	28,000	28,000	28,000	28,000	28,000	28,000	28,000	28,000	28,000
	32,000	32,000	32,000	32,000	32,000	32,000	32,000	32,000	32,000	32,000	32,000	32,000
	35,000	35,000	35,000	35,000	35,000	35,000	35,000	35,000	35,000	35,000	35,000	35,000
3	28,000	28,000	28,000	28,000	28,000	45,675	45,763	45,850	45,938	46,025	46,113	
	32,200	32,200	32,200	32,200	32,200	52,526	52,627	52,728	52,828	52,929	53,029	
	35,000	35,000	35,000	35,000	35,000	57,094	57,203	57,313	57,422	57,531	57,641	
4	46,200	46,288	46,375	46,463	46,550	46,638	46,725	46,813	46,900	46,988	47,075	47,163
	53,130	53,231	53,331	53,432	53,533	53,633	53,734	53,834	53,935	54,036	54,136	54,237
	57,750	57,859	57,969	58,078	58,188	58,297	58,406	58,516	58,625	58,734	58,844	58,953
5	47,250	47,338	47,425	47,513	47,600	47,688	47,775	47,863	47,950	48,038	48,125	48,213
	54,338	54,438	54,539	54,639	54,740	54,841	54,941	55,042	55,143	55,243	55,344	55,444
	59,063	59,172	59,281	59,391	59,500	59,609	59,719	59,828	59,938	60,047	60,156	60,266
6	48,300	48,388	48,475	48,563	48,650	48,738	48,825	48,913	49,000	49,088	49,175	49,263
	55,545	55,646	55,746	55,847	55,948	56,048	56,149	56,249	56,350	56,451	56,551	56,652
	60,375	60,484	60,594	60,703	60,813	60,922	61,031	61,141	61,250	61,359	61,469	61,578
7	49,350	49,438	49,525	49,613	49,700	49,788	49,875	49,963	50,050	50,138	50,225	50,313
	56,753	56,853	56,954	57,054	57,155	57,256	57,356	57,457	57,558	57,658	57,759	57,859
	61,688	61,797	61,906	62,016	62,125	62,234	62,344	62,453	62,563	62,672	62,781	62,891
8	50,400	50,488	50,575	50,663	50,750	50,838	50,925	51,013	51,100	51,188	51,275	51,363
	57,960	58,061	58,161	58,262	58,363	58,463	58,564	58,664	58,765	58,866	58,966	59,067
	63,000	63,109	63,219	63,328	63,438	63,547	63,656	63,766	63,875	63,984	64,094	64,203
9	51,450	51,538	51,625	51,713	51,800	51,888	51,975	52,063	52,150	52,238	52,325	52,413
	59,168	59,268	59,369	59,469	59,570	59,671	59,771	59,872	59,973	60,073	60,174	60,274
	64,313	64,422	64,531	64,641	64,750	64,859	64,969	65,078	65,188	65,297	65,406	65,516
10	52,500	52,588	52,675	52,763	52,850	52,938	53,025	53,113	53,200	53,288	53,375	53,463
	60,375	60,476	60,576	60,677	60,778	60,878	60,979	61,079	61,180	61,281	61,381	61,482
	65,625	65,734	65,844	65,953	66,063	66,172	66,281	66,391	66,500	66,609	66,719	66,828
11	53,550	53,638	53,725	53,813	53,900	53,988	54,075	54,163	54,250	54,338	54,425	54,513
	61,583	61,683	61,784	61,884	61,985	62,086	62,186	62,287	62,388	62,488	62,589	62,689
	66,938	67,047	67,156	67,266	67,375	67,484	67,594	67,703	67,813	67,922	68,031	68,141
12	54,600	54,688	54,775	54,863	54,950	55,038	55,125	55,213	55,300	55,388	55,475	55,563
	62,790	62,891	62,991	63,092	63,193	63,293	63,394	63,494	63,595	63,696	63,796	63,897
	68,250	68,359	68,469	68,578	68,688	68,797	68,906	69,016	69,125	69,234	69,344	69,453
13	55,650	55,738	55,825	55,913	56,000	56,088	56,175	56,263	56,350	56,438	56,525	56,613
	63,998	64,098	64,199	64,299	64,400	64,501	64,601	64,702	64,803	64,903	65,004	65,104
	69,563	69,672	69,781	69,891	70,000	70,109	70,219	70,328	70,438	70,547	70,656	70,766
14	56,700	56,788	56,875	56,963	57,050	57,138	57,225	57,313	57,400	57,488	57,575	57,663
	65,205	65,306	65,406	65,507	65,608	65,708	65,809	65,909	66,010	66,111	66,211	66,312
	70,875	70,984	71,094	71,203	71,313	71,422	71,531	71,641	71,750	71,859	71,969	72,078
15	57,750	57,838	57,925	58,013	58,100	58,188	58,275	58,363	58,450	58,538	58,625	58,713
	66,413	66,513	66,614	66,714	66,815	66,916	67,016	67,117	67,218	67,318	67,419	67,519
	72,188	72,297	72,406	72,516	72,625	72,734	72,844	72,953	73,063	73,172	73,281	73,391
16	58,800	58,888	58,975	59,063	59,150	59,238	59,325	59,413	59,500	59,588	59,675	59,763
	67,620	67,721	67,821	67,922	68,023	68,123	68,224	68,324	68,425	68,526	68,626	68,727
	73,500	73,609	73,719	73,828	73,938	74,047	74,156	74,266	74,375	74,484	74,594	74,703
17	59,850	59,938	60,025	60,113	60,200	60,288	60,375	60,463	60,550	60,638	60,725	60,813
	68,828	68,928	69,029	69,129	69,230	69,331	69,431	69,532	69,633	69,733	69,834	69,934
	74,813	74,922	75,031	75,141	75,250	75,359	75,469	75,578	75,688	75,797	75,896	76,016
18	60,900											
	70,035											
	76,125											

* Tandem axles with axle spacing of less than 3' 6" are treated as a single axle.

NEVADA DEPARTMENT OF TRANSPORTATION

GREEN WEIGHT AND BONUS OVERLOADS CHART

Example: 8' 0" Distance Between First and Last Axle

43,680
50,232
54,600

4 tires, 8' 0" Wide
8 tires, 8' 0" Wide
8 tires, 10' 0" Wide

Green Load = 1.3 x 700 (L + 40)
Green Load (+ 15%) = 1.15 x 1.3 x 700 (L + 40)
Green Load (+ 25%) = 1.25 x 1.3 x 700 (L + 40)

IN.→ FT.↓	0	1	2	3	4	5	6	7	8	9	10	11
2	24,000 27,600 30,000											
3	24,000 27,600 30,000	24,000 27,600 30,000	24,000 27,600 30,000	24,000 27,600 30,000	24,000 27,600 30,000	39,585 45,523 49,481	39,661 45,610 49,576	39,737 45,697 49,671	39,813 45,784 49,766	39,888 45,872 49,860	39,964 45,959 49,955	39,988 45,872 49,955
4	40,040 46,046 50,050	40,116 46,133 50,145	40,192 46,220 50,240	40,268 46,308 50,334	40,343 46,395 50,429	40,419 46,482 50,524	40,495 46,569 50,619	40,571 46,656 50,714	40,647 46,744 50,808	40,723 46,831 50,903	40,798 46,918 50,998	40,874 47,005 51,093
5	40,950 47,093 51,188	41,026 47,180 51,282	41,102 47,267 51,377	41,178 47,354 51,472	41,253 47,441 51,567	41,329 47,529 51,661	41,405 47,616 51,756	41,481 47,703 51,851	41,557 47,790 51,946	41,633 47,877 52,041	41,708 47,965 52,135	41,784 48,052 52,230
6	41,860 48,139 52,325	41,936 48,226 52,420	42,012 48,313 52,515	42,088 48,401 52,609	42,163 48,488 52,704	42,239 48,575 52,799	42,315 48,662 52,894	42,391 48,749 52,989	42,467 48,837 53,083	42,543 48,924 53,178	42,618 49,011 53,273	42,694 49,098 53,368
7	42,770 49,186 53,463	42,846 49,273 53,557	42,922 49,360 53,652	42,998 49,447 53,747	43,073 49,534 53,842	43,149 49,622 53,936	43,225 49,709 54,031	43,301 49,796 54,126	43,377 49,883 54,221	43,453 49,970 54,316	43,528 50,058 54,410	43,604 50,145 54,505
8	43,680 50,232 54,600	43,756 50,319 54,695	43,832 50,406 54,790	43,908 50,494 54,884	43,983 50,581 54,979	44,059 50,668 55,074	44,135 50,755 55,169	44,211 50,842 55,264	44,287 50,930 55,358	44,363 51,017 55,453	44,438 51,104 55,548	44,514 51,191 55,643
9	44,590 51,279 55,738	44,666 51,366 55,832	44,742 51,453 55,927	44,818 51,540 56,022	44,893 51,627 56,117	44,969 51,715 56,211	45,045 51,802 56,306	45,121 51,889 56,401	45,197 51,976 56,496	45,273 52,063 56,591	45,348 52,151 56,685	45,424 52,238 56,780
10	45,500 52,325 56,875	45,576 52,412 56,970	45,652 52,499 57,065	45,728 52,587 57,159	45,803 52,674 57,254	45,879 52,761 57,349	45,955 52,848 57,444	46,031 52,935 57,539	46,107 53,023 57,633	46,183 53,110 57,728	46,258 53,197 57,918	46,334 53,284 57,918
11	46,410 53,372 58,013	46,486 53,459 58,107	46,562 53,546 58,202	46,638 53,633 58,297	46,713 53,720 58,392	46,789 53,808 58,486	46,865 53,895 58,581	46,941 53,982 58,676	47,017 54,069 58,771	47,093 54,156 58,866	47,168 54,244 58,960	47,244 54,331 59,055
12	47,320 54,418 59,150	47,396 54,505 59,245	47,472 54,592 59,340	47,548 54,680 59,434	47,623 54,767 59,529	47,699 54,854 59,624	47,775 54,941 59,719	47,851 54,941 59,814	47,927 55,116 59,908	48,003 55,203 60,003	48,078 55,290 60,098	48,154 55,377 60,193
13	48,230 55,465 60,288	48,306 55,552 60,382	48,382 55,639 60,477	48,458 55,726 60,572	48,533 55,813 60,667	48,609 55,901 60,761	48,685 55,988 60,856	48,761 56,075 60,951	48,837 56,162 61,046	48,913 56,249 61,141	48,988 56,337 61,235	49,064 56,424 61,330
14	49,140 56,511 61,425	49,216 56,598 61,520	49,292 56,685 61,615	49,368 56,773 61,709	49,443 56,860 61,804	49,519 56,947 61,899	49,595 57,034 61,994	49,671 57,121 62,089	49,747 57,209 62,183	49,823 57,296 62,278	49,898 57,383 62,373	49,974 57,470 62,468
15	50,050 57,558 62,563	50,126 57,645 62,657	50,202 57,732 62,752	50,278 57,819 62,847	50,353 57,906 62,942	50,429 57,994 63,036	50,505 58,081 63,131	50,581 58,168 63,226	50,657 58,255 63,321	50,733 58,342 63,416	50,808 58,430 63,510	50,884 58,517 63,605
16	50,960 58,604 63,700	51,036 58,691 63,795	51,112 58,778 63,890	51,188 58,866 63,984	51,263 58,953 64,079	51,339 59,040 64,174	51,415 59,127 64,269	51,491 59,214 64,364	51,567 59,302 64,458	51,643 59,389 64,553	51,718 59,476 64,743	51,794 59,563 65,880
17	51,870 59,651 64,838	51,946 59,738 64,932	52,022 59,825 65,122	52,098 59,999 65,217	52,173 60,087 65,311	52,249 60,174 65,406	52,325 60,261 65,501	52,401 60,348 65,596	52,477 60,435 65,691	52,553 60,523 65,785	52,628 60,610 65,880	52,704 60,610 65,880
18	52,780 60,697 65,975											

* Tandem axles with axle spacing of less than 3' 6" are treated as a single axle.

AUTHORIZED TRIDEM AXLE COMBINATIONS AND BONUS WEIGHT SITUATIONS


Ft/In	0	1	2	3	4	5	6	7	8	9	10	11
8	57,960	58,061	58,161	58,262	58,363	58,463	58,564	58,664	58,765	58,866	58,966	59,067
9	59,168	59,268	59,369	59,469	59,570	59,671	59,771	59,872	59,973	60,000	60,000	60,000
10	60,000	60,000	60,000	60,000	60,000	xxxx						

Element 1: Authorized tridem axle group. Must be 8' to 10'4" from the 1st axle to the 3rd axle in group.

Element 2: Tridem bonus weight authorized on only one authorized tridem axle group. In addition to Element 1, minimum of 18 ft. between any 2 axles of a tridem axle combination and the closest axle of any adjacent axle group (i.e., close coupling is not authorized). Bonus weight per chart above.

Element 3: Tridem bonus weight authorized on one or two authorized tridem axle group(s). In addition to Elements 1 and 2, minimum of 25 ft. between the centerline of any axle of a bonus weight tridem axle combination to the centerline of any axle of another bonus weight tridem axle combination. Maximum of two bonus tridems on any vehicle combination.

EXAMPLE A

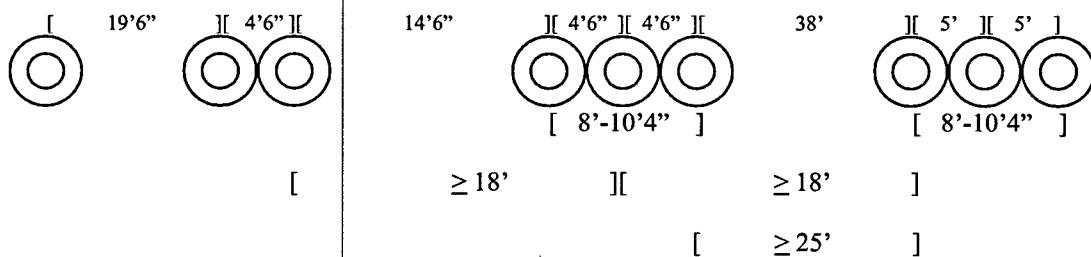


Element 1

Element 2

Element 3

EXAMPLE B

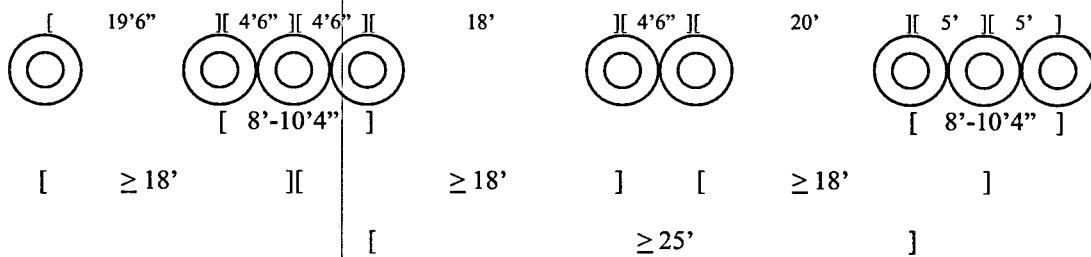

Element 1

Element 2

Element 3